

CAL MAXVU RAIL

Temperature Limit Device Datasheet



Overview

MAXVU Rail temperature and process limit is a device that's easy to install and fast to setup with an easy to read OLED display.

MAXVU Rail provides an affordable solution where secondary temperature limit protection is required, it offers a universal input and up to 3 outputs.

At a Glance

- DIN rail mounted
- Universal input
- Up to 3 outputs
- Digital Input
- RS485 communications option
- Fast configuration
- Clear OLED display
- 22.5mm module width

Specification

Input

Thermocouple	J, K, C, R, S, T, B, L, N.
RTD	3 Wire PT100
DC Linear	0 to 20mA, 4 to 20mA, 0 to 50mV, 10 to 50mV, 0 to 5V, 1 to 5V, 0 to 10V, 2 to 10V. Scalable -1999 to 9999, with adjustable dec point
Accuracy	Thermocouple $\pm 0.25\%$ of full range ± 1 LSD ($\pm 1^\circ\text{C}$ for thermocouple CJC). PT100 $\pm 0.25\%$ of full range, ± 1 LSD, Linear $\pm 0.25\%$ of full range, ± 1 LSD.
Sampling	4 per second
Impedance	>10M Ω resistive, except DC mA (5 Ω) and V (47K Ω)
Sensor Break Detection	<2 seconds (except zero based DC ranges), high alarms activate for T/C, RTD and mV ranges, low alarms activate for mA or V ranges
Digital Input	Reset Alarm. Volt Free or TTL compatible, 24VDC

Outputs & Options

Relay	LIMIT SPDT Form C, AL1 / 2 SPST Form A relay; current capacity 2A at 250V. >150,000 operations at rated voltage/current, resistive load
SSR	Drive capability >10V DC @ 20mA
Linear DC	0 to 20mA, 4 to 20mA, 0 to 5V, 0 to 10V or 2 to 10V Current Output 500 Ω max, Voltage Output 500 Ω min
Serial Communications	2 Wire RS485, 1,200 to 38,400 baud, Modbus RTU

Key Features

- Text / Icon matrix display
- Quick setup menu with main configuration parameters
- Thermocouple, PT100 or linear DC sensor input
- Up to 3 outputs; relay, SSR or Linear DC
- Isolated Digital input
- Limit alarm plus warning, high/low or deviation
- 3 button operation
- 3 status LEDs
- Front panel configuration or via PC configuration software
- RS485 Modbus RTU communications
- Spring terminal option available


Specification

Operating and Environmental

Temperature & RH	0 to 55°C (-20 to 80°C storage), 20% to 95% RH non-condensing
Altitude	<2000M
Power Supply	100 to 240V ±10%, 50/60Hz, 9VA(mains powered version) 24V DC/AC +10%/-15%, AC 50/60Hz, 5W (low voltage version)
Enclosure Protection	IP20
Standards	CE, UL*, cUL* & FM*
EMI	Complies with EN61326-1 (Susceptibility & Emissions)
Safety Considerations	Complies with EN61010-1 & UL61010-1 Pollution Degree 2, Installation Category II
Weight	0.20kg excluding packaging

*UL & FM not valid for Spring Terminal version

Dimensions

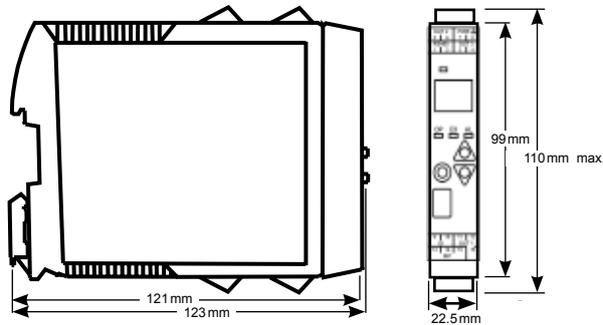

Ordering Code

MVR - 1 T x - x x x x - 5 x xx

Digital Input

Isolated

1

Terminal Type

U0 Screw Terminals
00 - S419 Spring Terminals

Supply Voltage

110 to 240V AC M
24V AC / DC L

Manual / HMI Language

1 English
2 French
3 German

Output

LIMIT	AL1	AL2 / PV	Z	R	0
C/O Relay	Relay	None	Z	R	0
C/O Relay	Relay	Relay	Z	R	R
C/O Relay	SSR	Linear	Z	A	L
C/O Relay	Relay	Linear	Z	R	L
C/O Relay	SSR	None	Z	A	0
C/O Relay	SSR	Relay	Z	A	R

Option


0 Not Fitted
C RS485 Communications

Accessories

MAXVU Configuration software

For PC setup MAXVU configuration software is available free of charge from www.west-cs.co.uk.

A USB configuration adaptor is also available from your local WCS distributor.

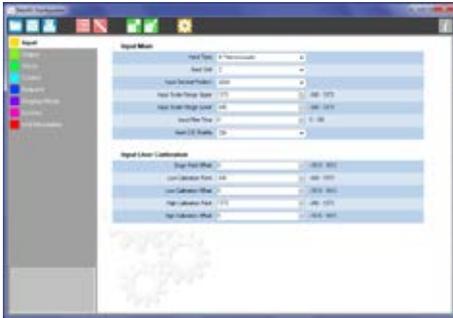


MAXVU configuration software is simple to use for fast set up of MAXVU devices.




Set-up wizard simplifies the set-up further.

Provides step-by-step guidance to device configuration with detailed assistance on each setting.

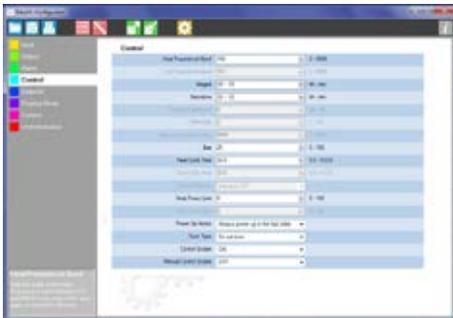

Clear and logical side tabs make it easy to find parameter settings in tabular form.

Simple icon driven taskbar along top for all main functions

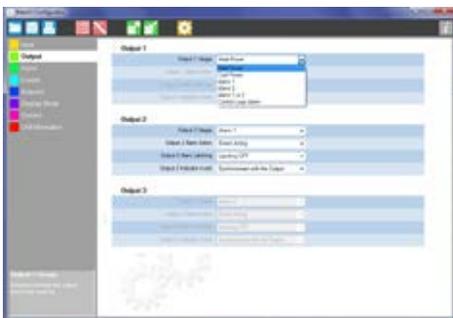

Each parameter shows current setting and can easily be changed by drop-down menus or entering values.

Allowable setting range is shown for guidance.

A useful help box provides additional assistance.

Contact



Email: enquiries@west-cs.com

Website: www.west-cs.co.uk



Telephone: +44 (0)1273 606271

Fax: +44 (0)1273 609990



Address: The Hyde Business Park
Brighton, East Sussex
BN2 4JU
United Kingdom

WEST
Control Solutions

DS-MVRL-2-UK-1705